
	REVISIONS											
REV	DESCRIPTION	DATE	INITIAL	APPROVED								
1	CH'D BUTTON, BUTTON NOW WELDED, RIVET ELIMINATED.	4/29/02	-	-								
2	GRINDING OF BUTTON WELD ELIMINATED.	11/26/02	-	-								
3	MATERIAL CHANGE TO STAINLESS STEEL P/N -1, -3, -7.	7/28/04	-	-								
4	DELETED UNASSOCIATED .330 MEASUREMENT FROM X-REF. P/N -3.	11/21/06	-	-								
5	CH'D ENGRAVE, ADDED FARSIDE ENGRAVE S/N, "MADE IN USA".	4/30/09	-	-								
5A	CH'D TITLEBLOCK & REVISION BLOCK, CH'D REVISIONS TO NUMERICAL, ADDED DRAW BOLT, THUMB NUT, & ACORN NUT TO ASSY. VIEW.	8/17/09	RJC	ı								
6	REMOVED PLUG WELD FOR OPTIONAL FIXTURE HOLE. SHT 2 -1 REMOVED OPTIONAL FIXTURE HOLE3 CHANGED FROM .750 TO .730.	7/10/12	JAG	_								

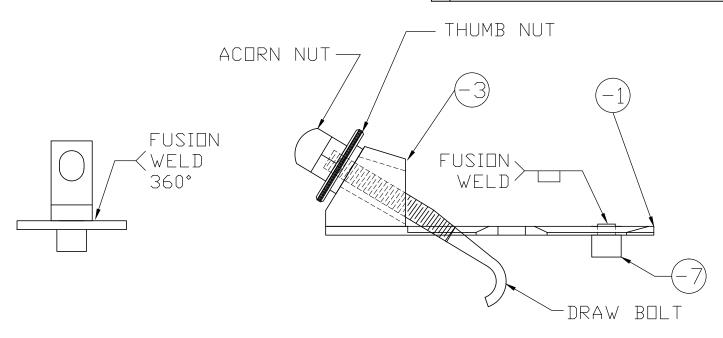

ASSEMBLY

\* SAME PART USED ON OTHER RIGGING TOOLS

Y22AY Y QTY	B/0	PART #	INIT QTY	DESCRIPTION	MATERIAL	B/O INFORMATION OR SPECIFICATIONS	Ţ
		-1	1	PLATE	2.2.	.080 × 1 × 3	
		-3*	1	LUG	2.2.	5/8 × 3/4 × 3/4	
		-7 <b>*</b>	1	BUTTON	2.2.	Ø.270 × .300	
		RBA9935*	1	DRAW BOLT			Ī
	B/□*		1	ACORN NUT	2.2.	10-32 UNF	
	B/□*		1	THUMB NUT	STEEL	10-32 UNF BLACK REID TOOL #V-1	

® RED BARN MACHINE

""LATERAL RIGGING TOOL

-	DWG NO.	REV			
g.	KRAAA58-A	6			
2	UNLESS OTHERWISE SPECIFIED DRAWN BY: COLE				
2	TOLERANCES ON: APPROVED				
	DECIMALS .XXX ± .005 FRACTIONS ± 1/32 TREAT				
_	XX ± .01 ANGLES ± .5* SPEC FINISH				
L	UNLESS OTHERWISE SPECIFIED USED ON MODEL				
l	1. BREAK ALL SHARP EDGES MD 500	MD 500			
ı	.015 × 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING				
	SCALE NTS DATE 4-22-02 SHEET 1 of	2			

